




| | | | |
|-----------|-------------------------|---------|-------|
| DWG. NO. | 090-3064 | | |
| SIZE | D | | |
| REVISIONS | | | |
| SYM. | E.C.O. | DATE | APVD. |
| A | 27441 | 7/19/11 | |
| | ADDED SHUNT TRIP OPTION | | |
| B | 27467 | 7/21/11 | |
| | SHUNT TRIP NOW STANDARD | | |

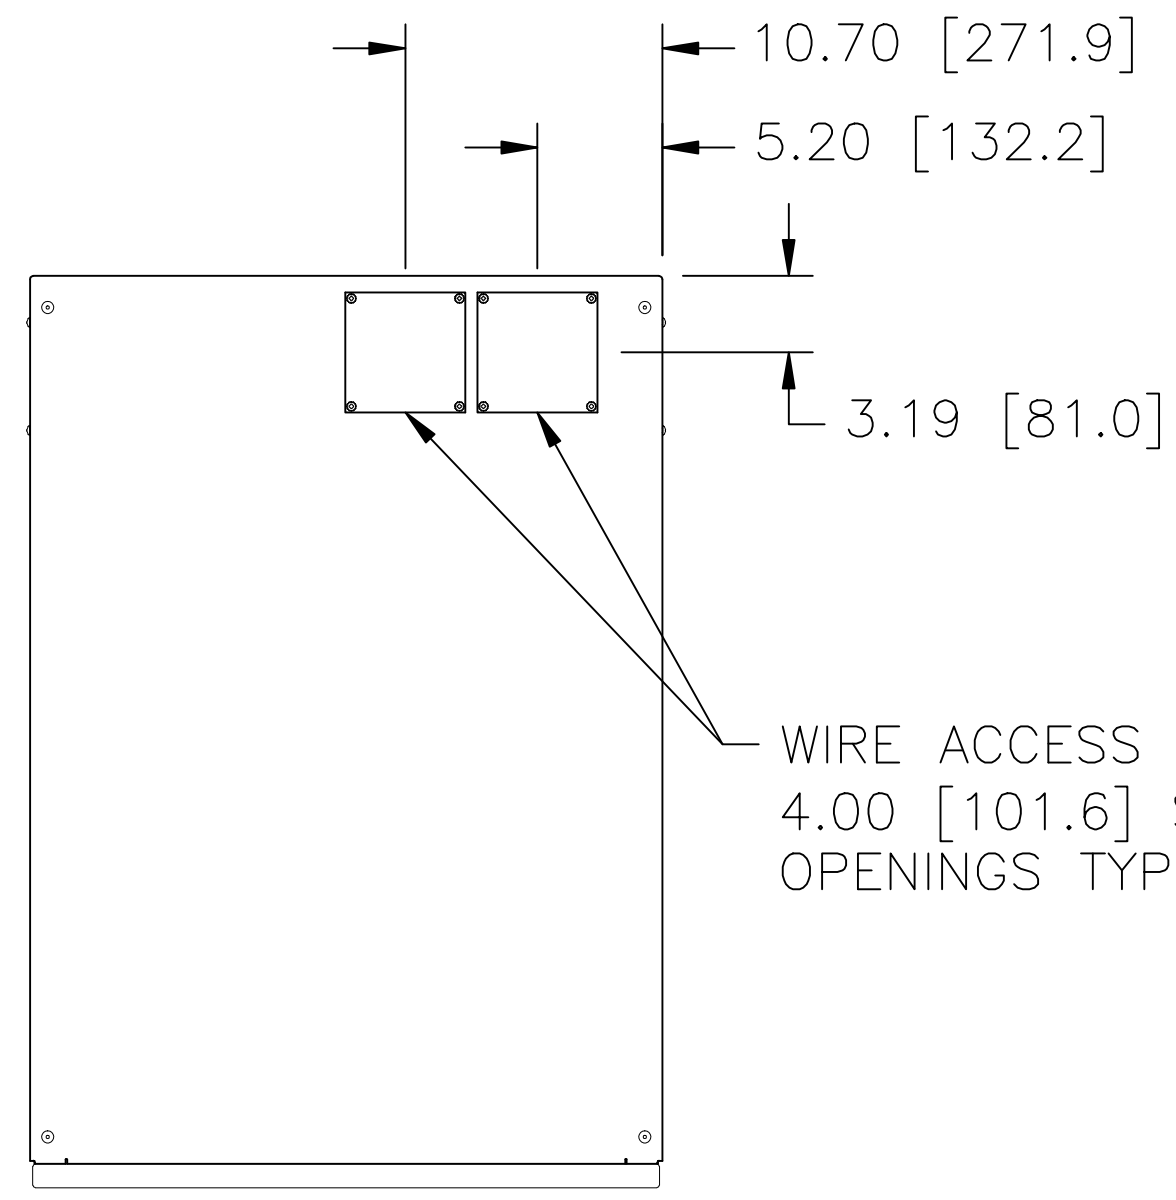


TOP VIEW

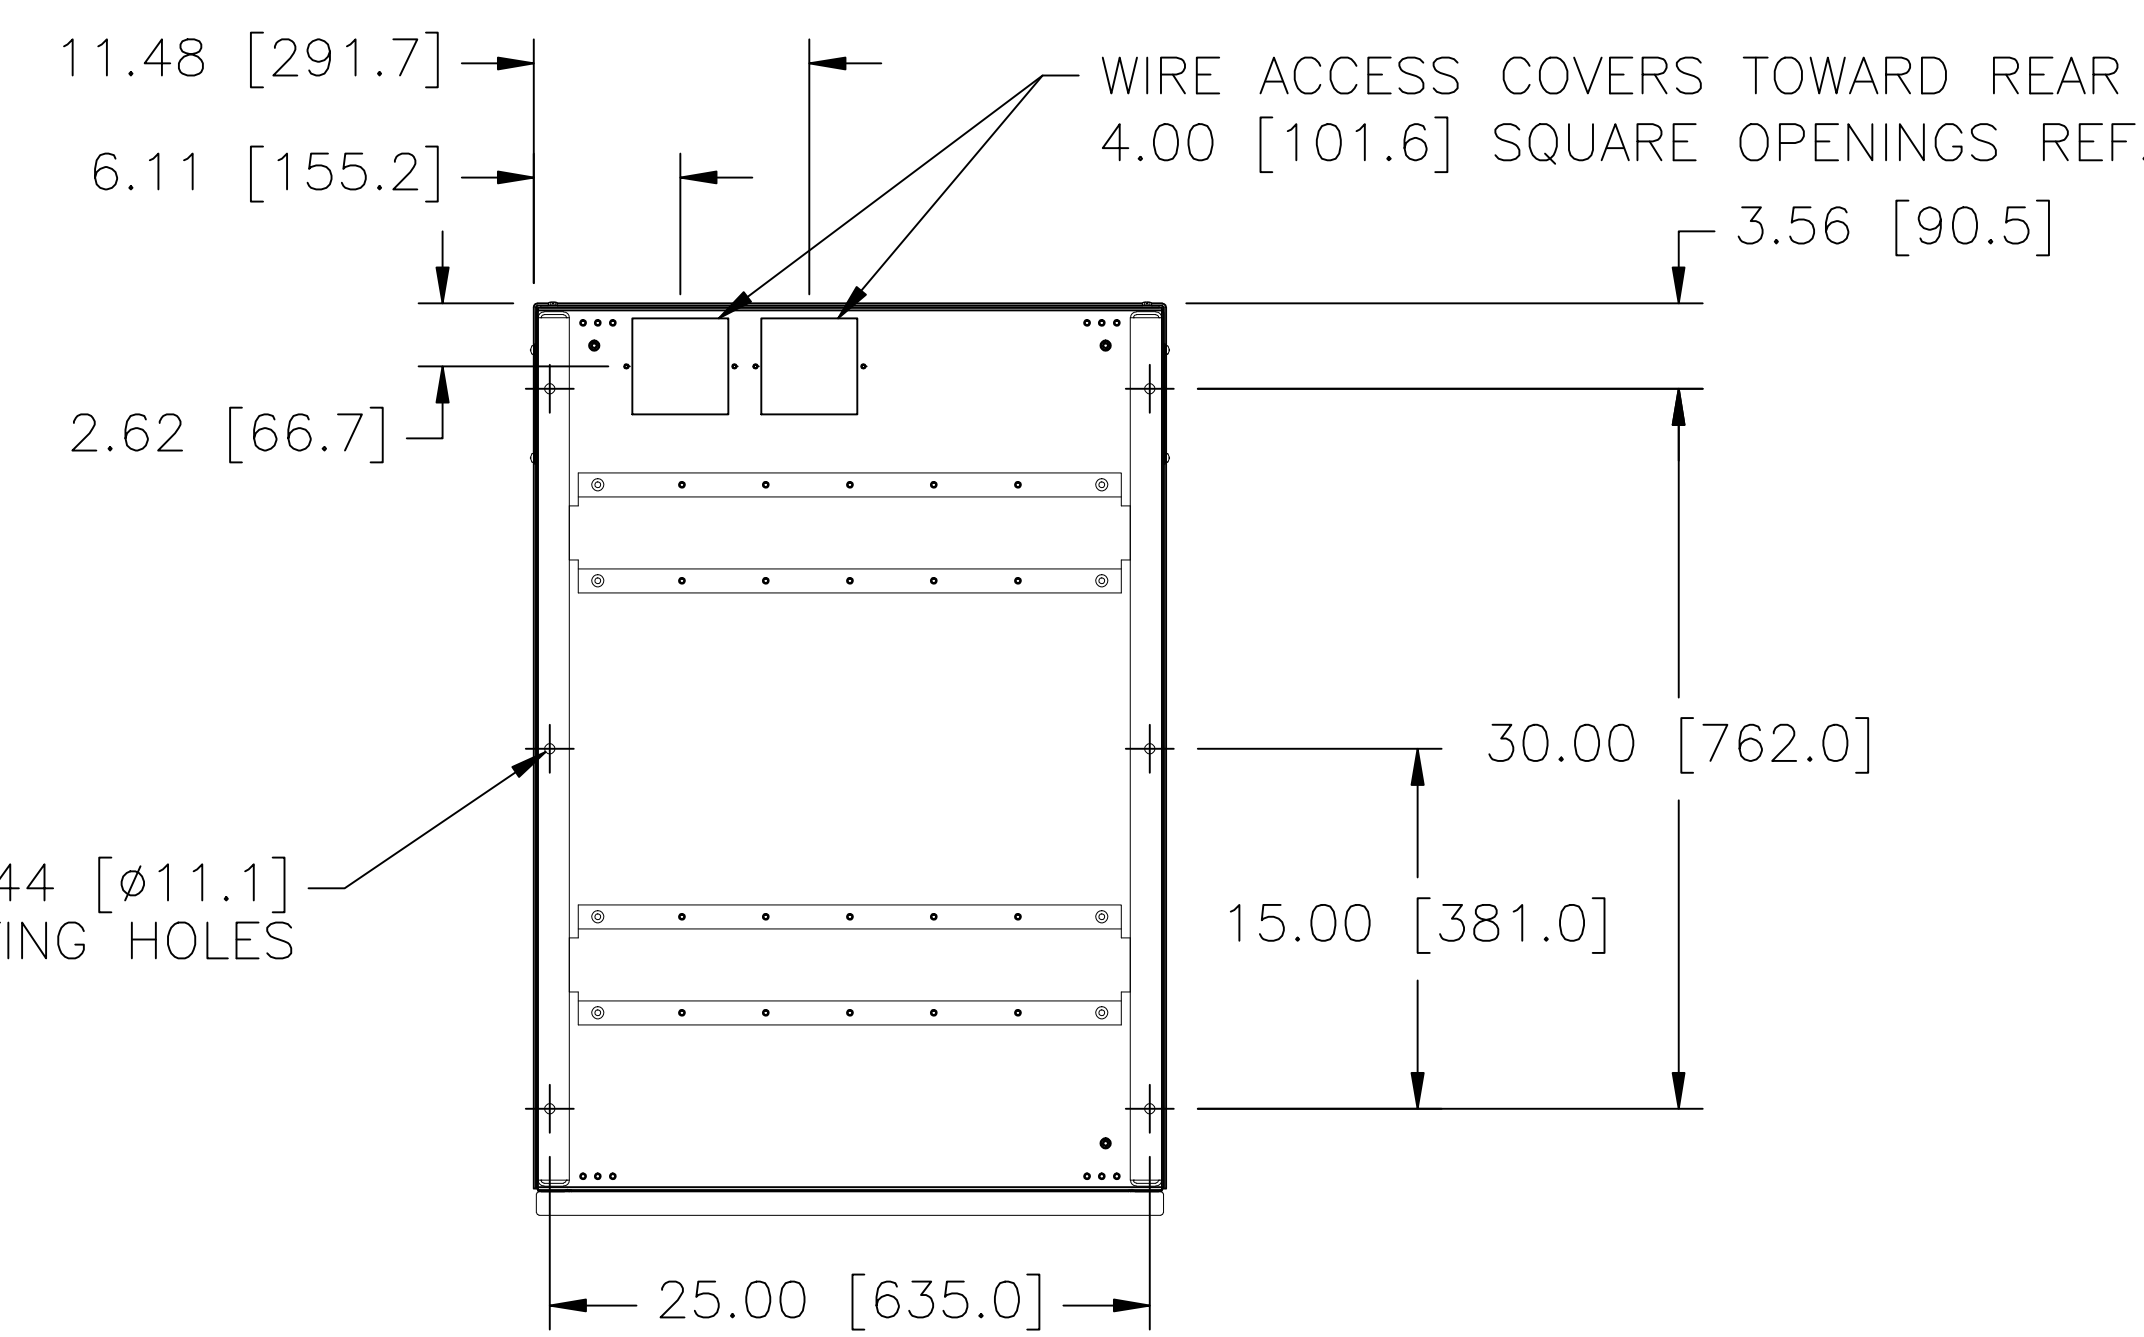


BOTTOM VIEW AS VIEWED FROM BOTTOM

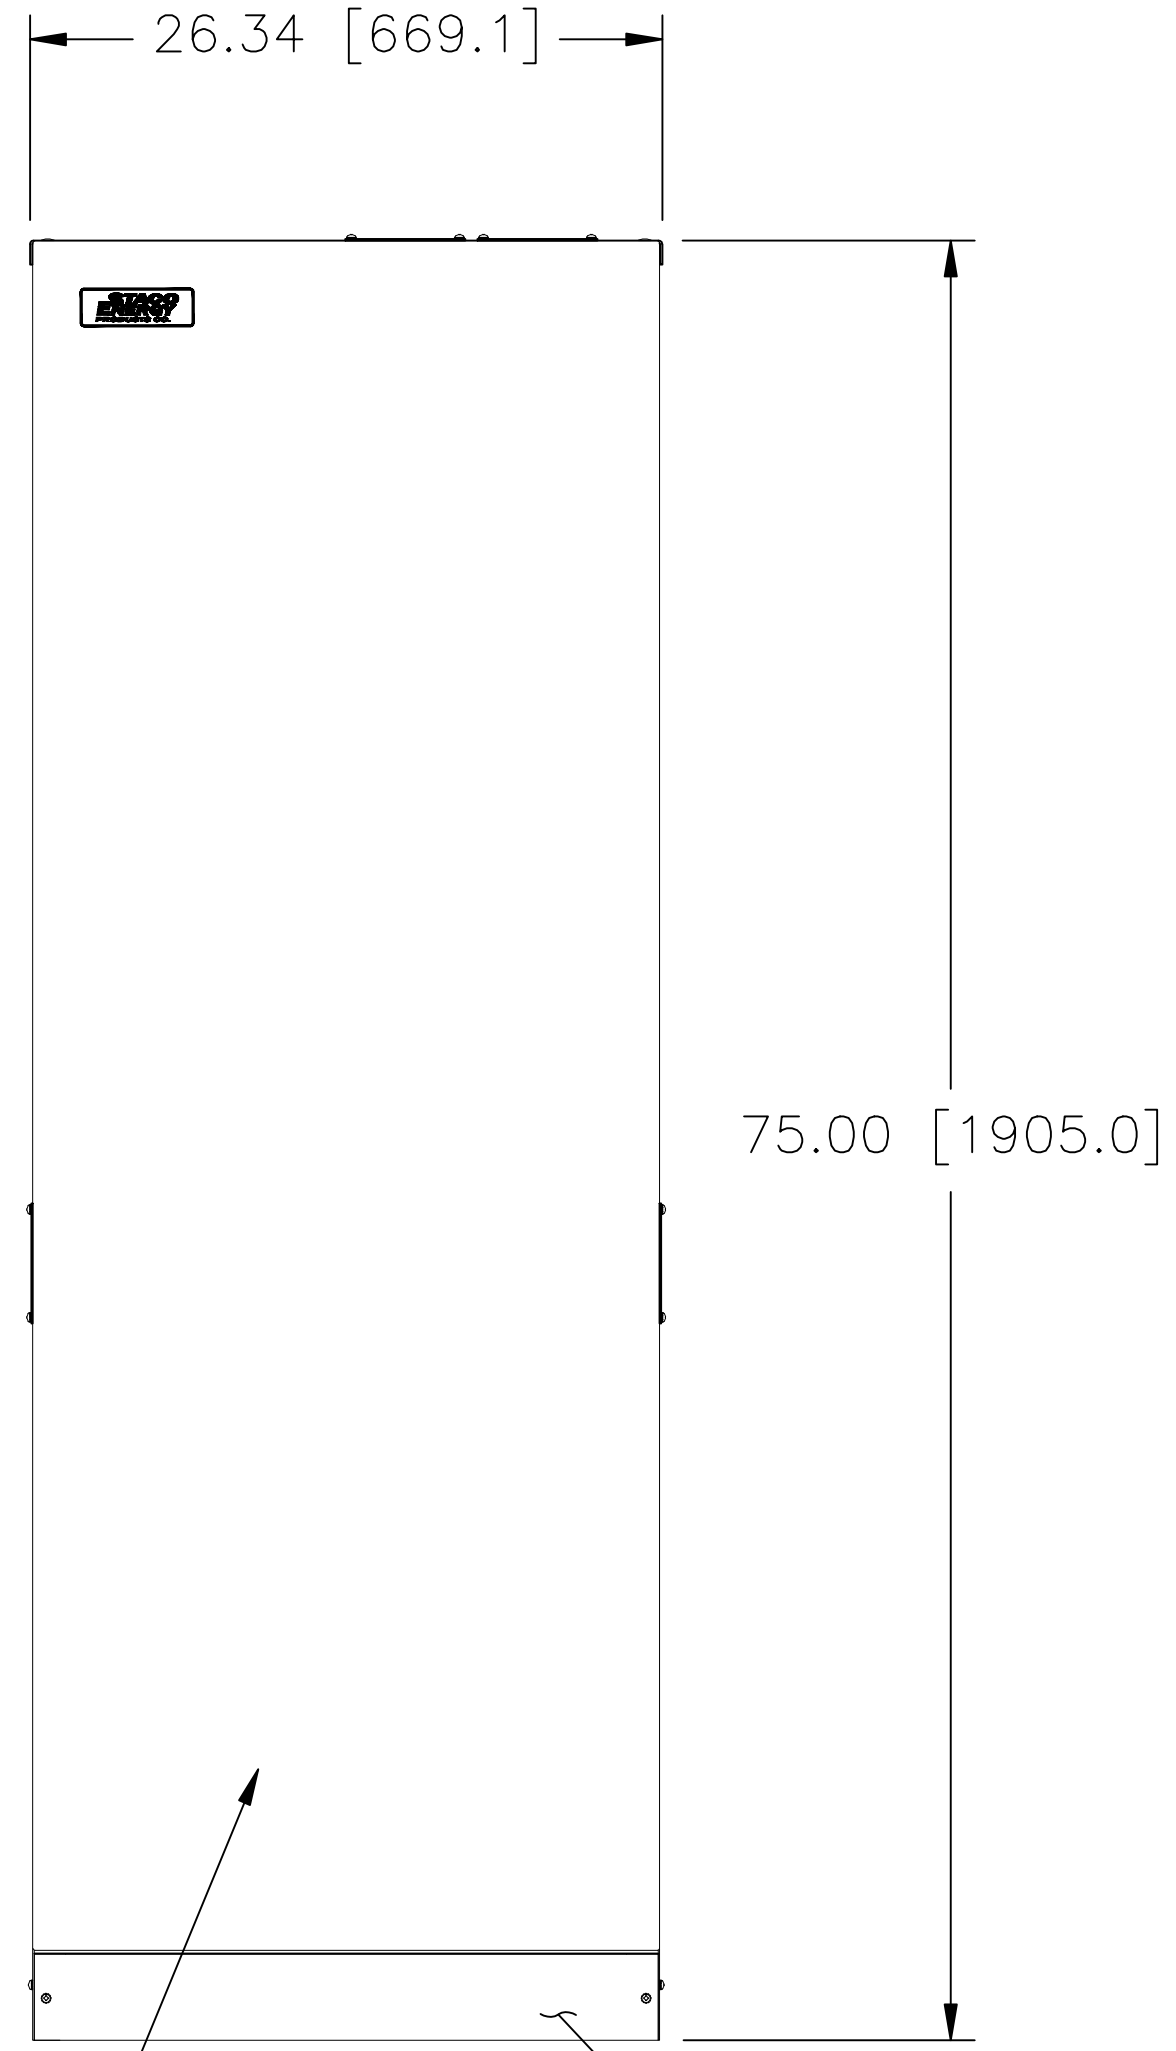

FRONT VIEW

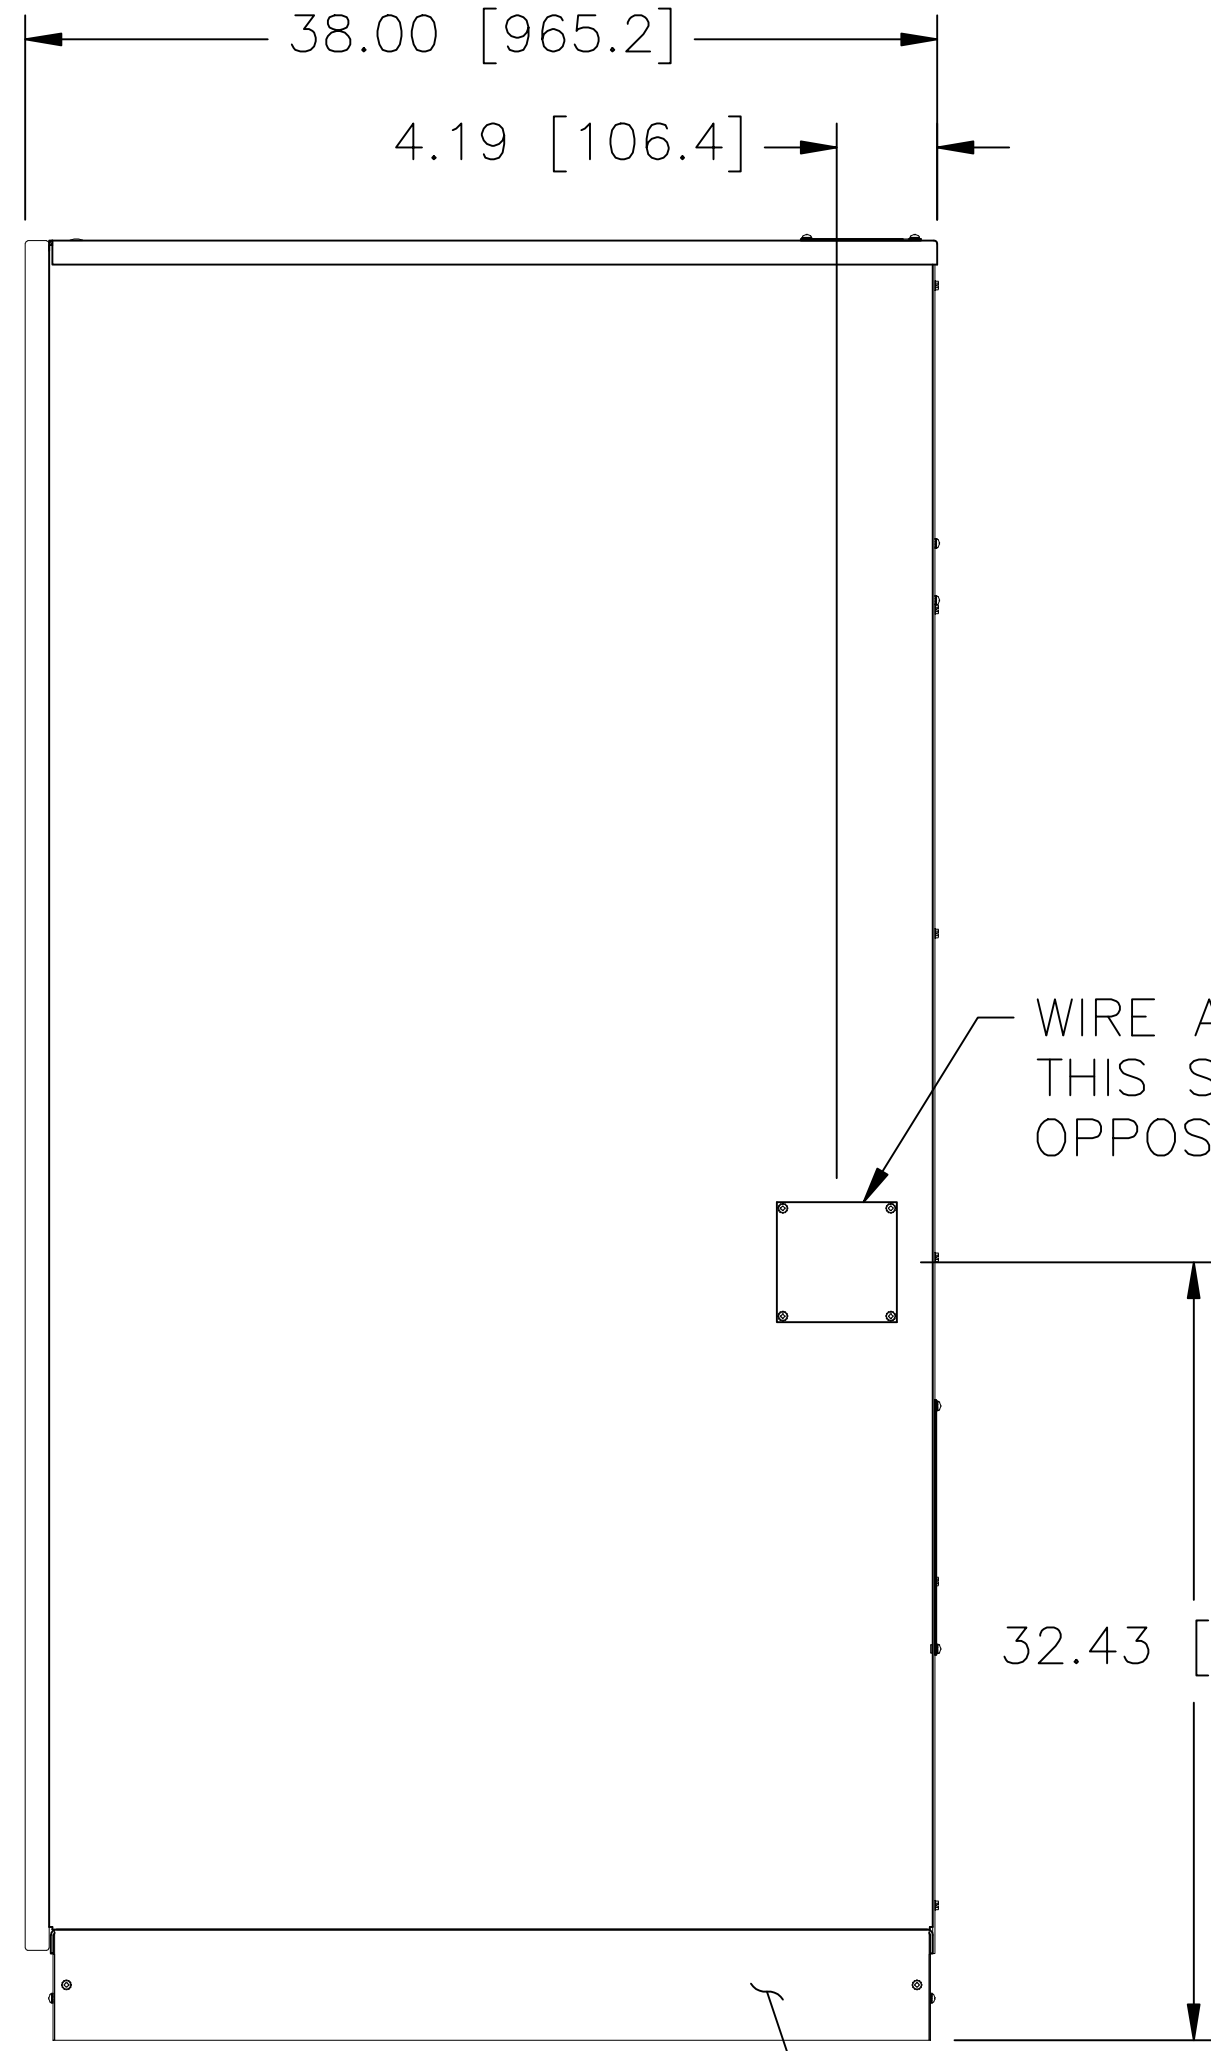

RIGHT SIDE VIEW

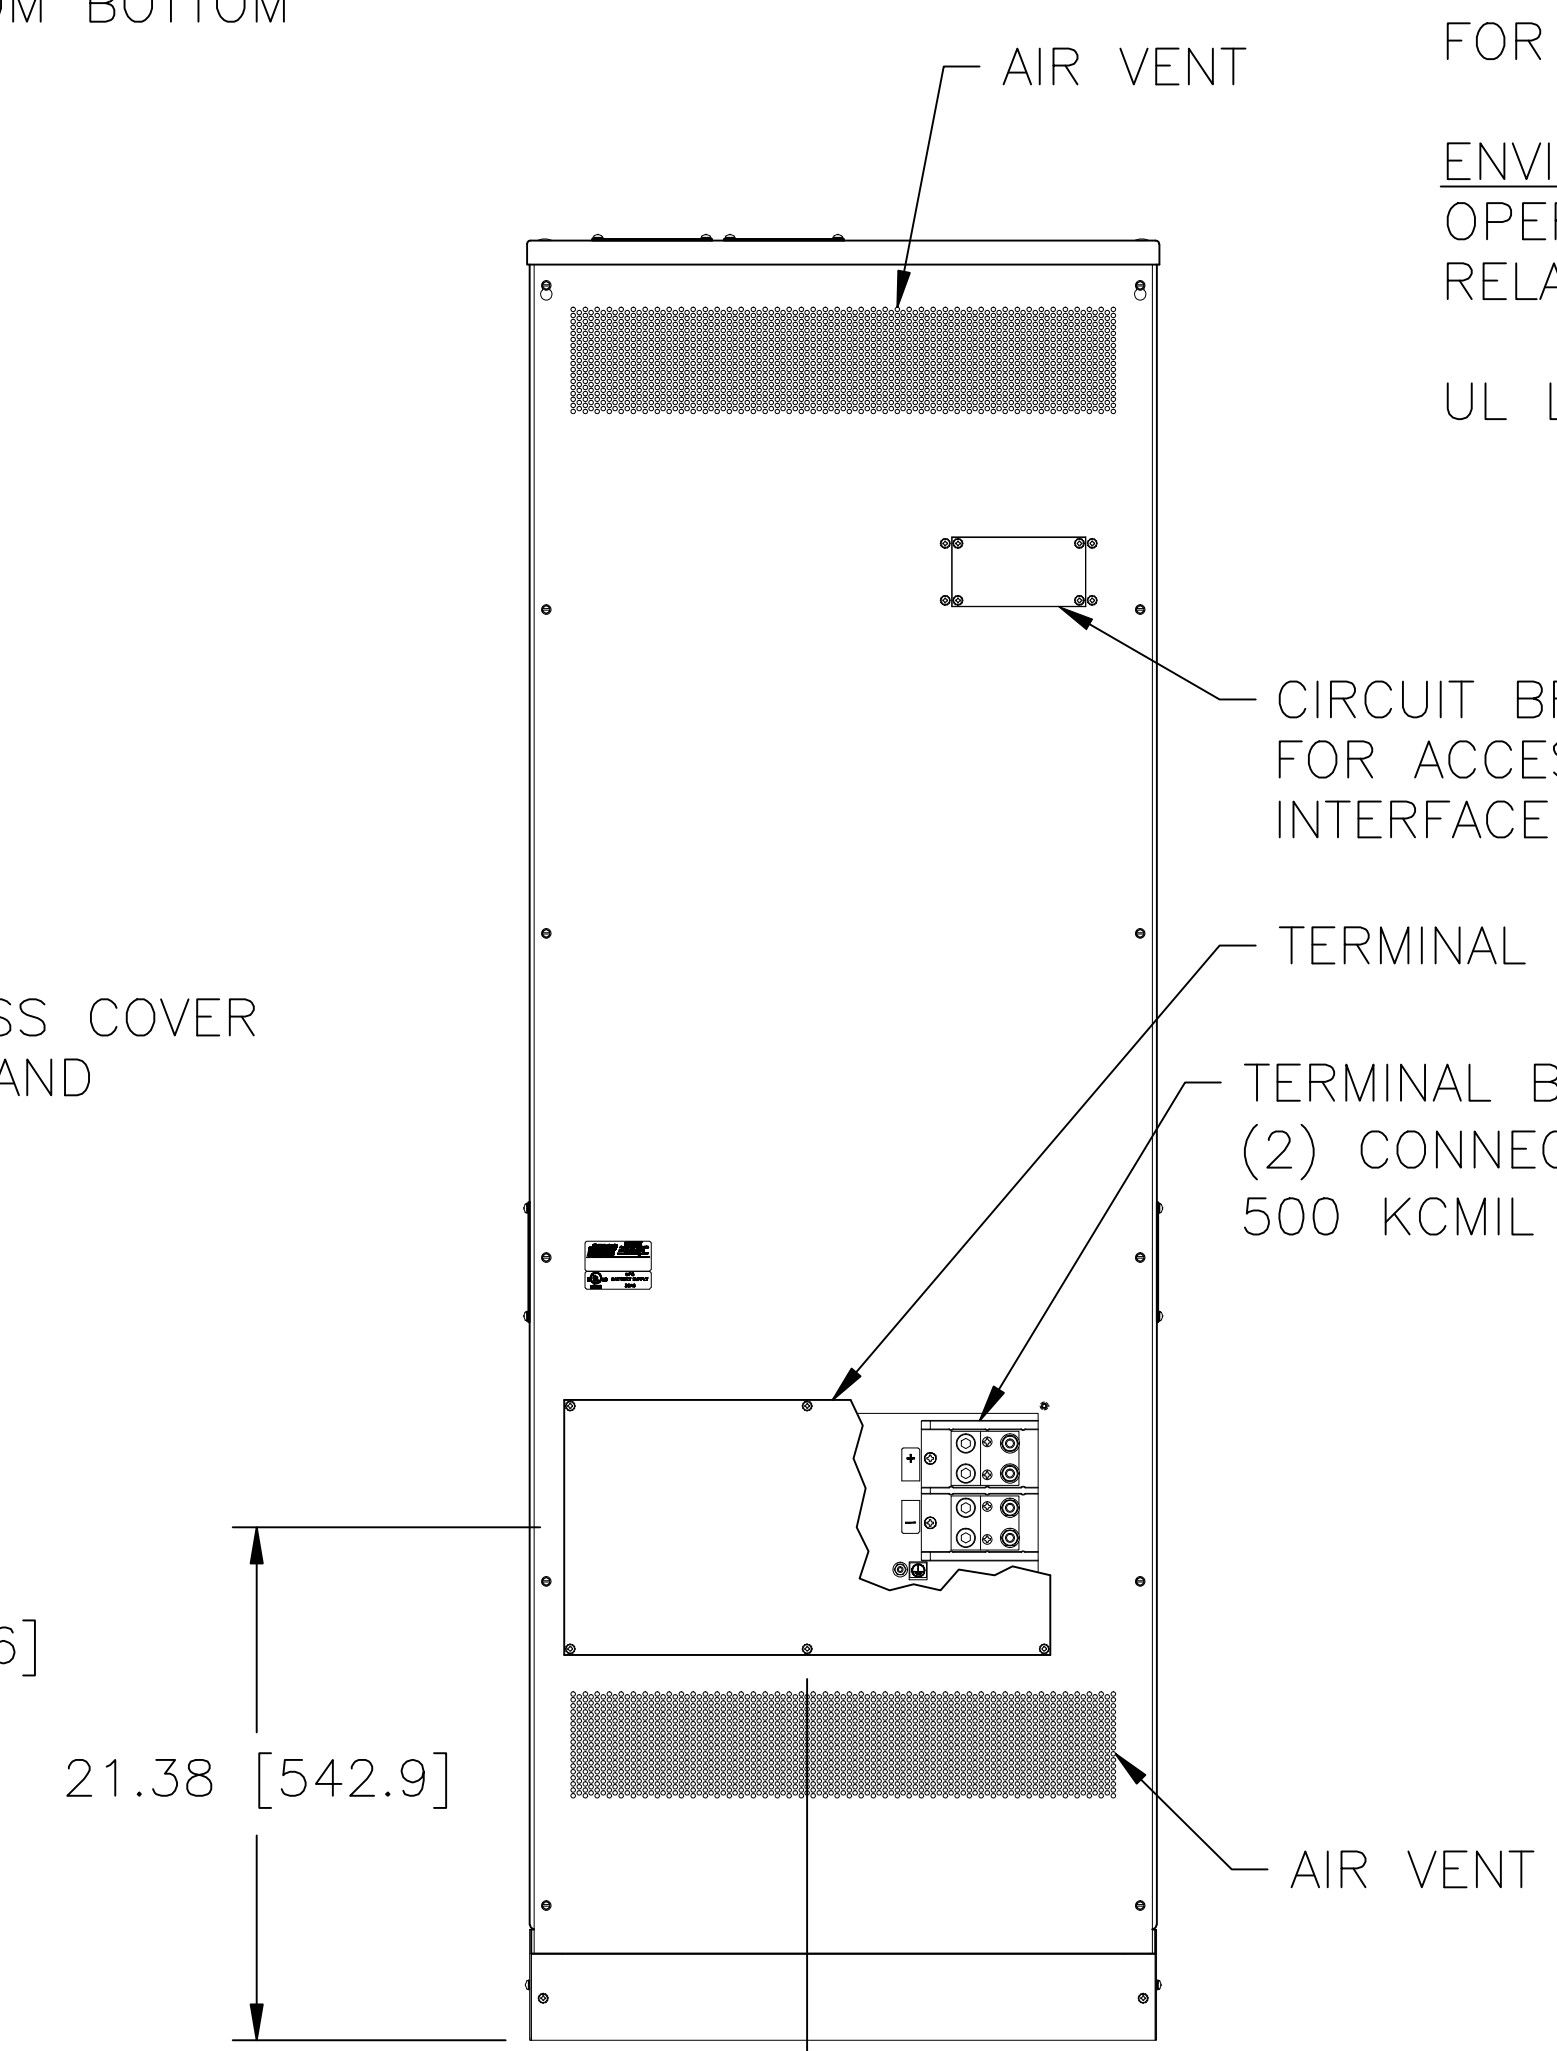

REAR VIEW

SUMMARY OF EQUIPMENT

THE FIRSTLINE P BATTERY CABINET IS USED IN CONJUNCTION WITH THE FIRSTLINE P UPS TO PREVENT THE LOSS OF ELECTRONIC INFORMATION AND MINIMIZE EQUIPMENT DOWN TIME. DURING BROWNOUTS, BLACKOUTS, AND OTHER POWER INTERRUPTIONS, THE BATTERIES PROVIDE EMERGENCY POWER TO SAFEGUARD OPERATION.

ALL FIRSTLINE P BATTERY CABINETS ARE SUPPLIED WITH INTERNAL FUSING, CIRCUIT BREAKER WITH SHUNT TRIP AND INTERFACE BOARD FOR EMERGENCY POWER OFF (EPO) USE.

ENVIRONMENTAL

OPERATING TEMPERATURE: 0°C TO 40°C
RELATIVE HUMIDITY: 0-90%, NON-CONDENSING

UL LISTED TO UL 1778, FILE NO.: E191175

| SPECIFICATIONS | | | | |
|---------------------|----------------------------|-------------------|----------------|-------------------------|
| MODEL | CIRCUIT BREAKER RATING (A) | NUMBER OF STRINGS | DC BUS VOLTAGE | WEIGHT APPROX. LBS (KG) |
| FLU-BAT-200-1-480-B | 200 | 1 | 480 VDC | 2100 (953) |
| FLU-BAT-200-2-480-B | 200 | 2 | 480 VDC | 3700 (1678) |
| FLU-BAT-300-2-480-B | 300 | 2 | 480 VDC | 3700 (1678) |

| | | | | | |
|--------------------------------------------|-------|------------------------------------|--------|-----------------------------------|--|
| UNLESS OTHERWISE SPECIFIED, TOLERANCE IS ± | | UNITS | | TITLE: SPEC. CONTROL DRAWING | |
| DECIMALS | HOLE | ANGLES | DRAFT | FIRST LINE P 200W BATTERY CABINET | |
| .XX | .0005 | 1° | 1-1/2° | DRAWN BY: S.A. SMITH | |
| .XXX | .005 | | | DATE: 10/18/10 | |
| MATERIAL: | | ALL DIMENSIONS APPLY AFTER PLATING | | FIRST USED ON | |
| | | | | DO NOT SCALE DWG. | |
| | | | | CHECKER: SAS | |
| | | | | DATE: 3/25/11 | |
| | | | | WEIGHT APPROX. CAGE CODE 83008 | |
| | | | | ENGINEER: R. BAKER | |
| | | | | DATE: 6/10/11 | |
| | | | | SCALE: 1/8 | |
| | | | | SHEET 1 OF 2 | |
| | | | | DWG. NO. 090-3064 | |



